

Hurricane Rated

Amarr Residential Garage Doors







SELECT YOUR WIND LOAD DOOR

	Steel Car	riage House	Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
7	AMARR	CARRIAGE COURT	90-130 mph		
8	AMARR	CLASSICA°	90-185 mph		М
9	AMARR	HILLCREST	90-169 mph		
10	AMARR	DESIGNER'S CHOICE	90-155 mph		
	Steel Trac	ditional	Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
10	AMARR	OLYMPUS	90-155 mph		
11	AMARR	H E R I T A G E°	90-190 mph		М
12	AMARR	NORTHWOODS	90-190 mph		М
13	AMARR	LINCOLN	90-169 mph		
	Specialty		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
15	AMARR	BY DESIGN	110-175 mph		M
15	AXOLOT	TL FOR AMARR	140 mph		
	Aluminun	i	Wind Speed Approvals*		
16	AMARR	HORIZON	134-168 mph [†]		
17	AMARR	VISTA	90-151 mph		

AMARR ADVANTAGE

STYLISH STRENGTH



With Amarr garage doors, you don't have to compromise style for hurricane preparedness. Almost all Amarr residential garage doors are available

with a wind load reinforcement system that meets or exceeds building code requirements in your area. Whether your home is traditional or contemporary, our Amarr garage door designs can add beauty, curb appeal and long lasting value to your home.

SAFETY



Garage doors are the largest and heaviest moving object in the home. Amarr garage doors have a patented safety bottom bracket to reduce the risk of serious injuries.

SUSTAINABILITY

Amarr products are made with up to 90% recycled content and approximately 5-10% of the steel is reused at the steel mill.

ENERGY EFFICIENCY AND THERMAL PERFORMANCE

Maintain the temperature in your garage with an energy efficient garage door. For best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value rating (more heat resistance). We offer a wide range of materials, insulations and door thicknesses to provide the level of energy efficiency you desire. Learn more about the thermal performance of Amarr garage doors at amarr.com/energy-efficiency or on page 19.

HURRICANE RATED DOORS

When installed according to our instructions and local building codes, Amarr hurricane rated garage doors:



- Withstand rapid cyclic pressure and static load forces up to 245 mph.1
- · Resist large missile impact at 50' per second (35 mph).2
- · May qualify for discounts on your homeowner's insurance.3

Meet or exceed these building codes:

- Florida Building Code (FBC)
- International Code Council (ICC)
- Texas Department of Insurance (TDI)
- High-Velocity Hurricane Zone (HVHZ)
 - M (Miami Dade and Broward Counties)

WIND LOAD APPROVED DOORS

Use a variety of reinforcement materials, including Struts and R-Trusses which are engineered to meet specific building code requirements. Amarr garage doors are tested in accordance with DASMATDS-108. Impact glass

is available in short and long panel windows on select Amarr garage doors; impact glass may shatter, but remains intact despite the force.



MADE IN USA

All Amarr residential and commercial steel and aluminum garage doors are manufactured in the USA, affirming our commitment to high quality and



durability.

Exposure B with a mean root height less than 30' based on ASCE7-10. (577-67 PSF) Option available on select models only. Check with your insurance provider for details

AMARR CONSTRUCTION

STEEL

SINGLE-LAYER:

Steel

Amarr Classica, Heritage, Hillcrest & Lincoln

- · Heavy-duty exterior steel
- Durable, reliable, low maintenance



DOUBLE-LAYER:

Steel + Insulation

Amarr Classica, Heritage, Hillcrest & Lincoln

- · Heavy-duty exterior steel
- · Durable, reliable, low maintenance
- Environmentally safe polystyrene thermal insulation with vinyl backing
- Energy efficient
- Quiet operation



TRIPLE-LAYER:

Steel + Insulation + Steel

Amarr Classica, Designer's Choice, Heritage, Hillcrest, Lincoln & Olympus

- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- · Environmentally safe polystyrene or polyurethane thermal insulation
- Superior energy efficiency
- Extra quiet operation





- True White Bead Board only All panels and colors except True White Bead Board.
- True White Short and Flush panels only All panels and colors except True White Short and Flush panels

STEEL

FOUR-LAYER:

Overlay + Steel + Insulation + Steel

Amarr Carriage Court

- Heavy-duty exterior and interior steel
- · Durable, reliable, low maintenance
- Environmentally safe polystyrene thermal insulation
- **Energy efficient**
- Extra quiet operation



ALUMINUM


Aluminum + Glass

Amarr Vista

- 2" thick extruded commercial-grade aluminum frame for durability
- Corrosion resistant aluminum
- ClearView Strut System strengthens door without restricting view

Amarr Horizon

- Extruded aluminum frame provides durability, low maintenance and corrosion resistance
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability
- 7' tall doors are three sections high
- Equal glass heights in all sections
- Glass expanses up to 8'2" wide



Aluminum + Laminate Panel

Axolotl for Amarr


- 2" thick extruded commercial-grade aluminum frame for durability
- Tough, compact exterior laminate panels with premium Axolotl surface finish
- Image not shown

WOOD

Wood + Insulation + Wood

Amarr by Design

- Custom, handcrafted carriage house designs
- Multiple wood options
- Paint or stain grade wood
- Environmentally safe polystyrene thermal insulation
- **Energy efficient**





Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.
For best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value rating (more heat resistance).

UNDERSTAND YOUR AREA WIND LOAD REQUIREMENTS Local government regulations for wind load requirements can vary from one location to another due to door size, the door's location on the structure, and localized wind zones, among other factors. The homeowner is responsible to make sure their garage door meets local building codes. United States East Coast & Gulf Wind Zones Based on ASCE7-10 WindPro Rating Based on ASCE7-05 WindPro Rating WP1 & WP2 WP2 & WP3 90 - 100 mph 115 - 130 mph 130 - 150 mph WP5 100 - 110 mph WP2 & WP3 110 - 120 mph **WP3 & WP4** WP4 & WP5/WP5i 150 - 170 mph 120 - 130 mph WP4 & WP5/WP5i WP6i-WP10i 170 + mph 130 - 150 mph WP5i-WP10i

WINDPRO™ CLASSIFICATION SYSTEM

Amarr WindPro classification system helps you to easily find the Amarr Wind Load door for your location. Amarr WindPro WP classification indicates the miles per hour (mph) wind speed range and impact resistance. The higher the "WP" classification, the higher the approved mph wind speed range. The "WPi" classification indicates an impact-approved door.

ASCE 7-10/

110-124 125-139 140-149
125-139
140-149
150-164
165-175
176-189
190-204
205-219
165-175
176-189
190-204
250-219
220-229
230+

Exposure 8 with a mean root height < 30'




AMARR CARRIAGE COURT

Distinctly defined. The Amarr Carriage Court collection adds increased curb appeal to your home. Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.

DESIGNS





Pinetop (PT)





NOT AVAILABLE WITH WINDOWS

Ashley (AL)
























*Closed Square only

CC4000 Four-Layer: Overlay + Steel + Insulation + Steel



Decorative Windows & Hardware

Optional decorative windows & hardware add character to your door. See page 14 for all window and decorative hardware options.

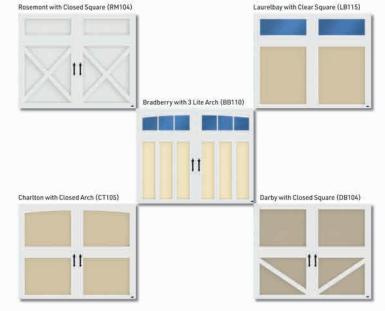



Door, window frames, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher Contact paint manufacturer for LRV ratings.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to	Door Width	WindPro	Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Wind	ows
14' tall or a max weight of 635 lbs.	Up To		MPH ¹ /MPH ² (PSF Design Pressures)		Standard	Impact
Amarr Carriage Court	9'	WP1-WP5	90 - 130 mph 116 - 168 mph (12.7/-14.9) - (26.4/-31.1)	Yes ³	Yes ³	No
CC4000	16'	WP1-WP5	90 - 130 mph 116 - 168 mph (12.1/-13.8) - (25.3/-28.7)	Yes ³	Yes ³	No
Lifetime Limited Warranty	18'	WP1-WP5	90 - 130 mph 116 - 168 mph (12.0/-13.6) - (25.1/-28.4)	Yes ³	Yes ³	No

Tested in accordance with DASMATDS-108 Based on ASCE7-05 Based on ASCE7-10. Option available on select models





AMARR CLASSICA

Looks can be deceiving. From a distance, you see wood. Up close, it's sturdy, durable, low-maintenance steel. Attractive and structurally strong carriage house styles that go up and down like traditional garage doors. Three-section tall designs, instead of four, help deliver a more authentic carriage house look. Deception never looked so good.

DESIGNS

CARRIAGE HOUSE















MODERN - Available in CL3000 only





CL1000 Single-Layer:

CL2000 Double-Layer: Steel + Insulation

CL3000 Triple-Layer: Steel + Insulation + Steel



Decorative Windows & Hardware

Optional decorative windows & hardware add character to your door. See page 14 for all window and decorative hardware options.

COLORS





















Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.









*Odd heights not available in CL1000/CL2000; 1Not available in Flush.





11





WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to	Door Width	WindPro	Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Windows	
14' tall or a max weight of 635 lbs.	Up To		MPHYMPH ² (PSF Design Pressures)		Standard	Impact
Amarr Classica CL3000	9'	WP1-WP5/ WP5i-WP10i	90 - 180 mph 116 - 232 mph (12.8/-15.1) - (50.8/-59.8)	Yes	Yes	Yes ³
Lifetime	16'	WP1-WP7/ WP5i-WP7i	90 - 151 mph 116 - 194 mph (12.2/-13.8) - (33.7/-38.1)	Yes	Yes	Yes ³
Limited Warranly	18'	WP1-WP5/ WP5i-WP7i	90 - 151 mph 116 - 194 mph (12.2/-13.8) - (33.7/-38.1)	Yes	Yes	Yes ³
Amarr Classica Full View CL3000	9'	WP5	130 mph 169 mph (26.7/-31.6)	Yes	Yes	Yes
	16'	WP4/WP5i	120-130mph 156-168mph (21.8/-24.8) - (25.3/-28.8)	Yes ³	Yes	Yes
Miami-Dade			N/A	N/A	N/A	N/A
Amarr Classica CL1000 and	9'	WP1-WP5/ WP7i-WP10i	90-185mph 116-235mph (12.7/-14.9) - (54.4/-62.0)	Yes ³	Yes ³	No
CL2000 Lifetime	16'	WP1-WP6/ WP5i-WP8i	90 - 169 mph 116 - 218 mph (12.3/-13.9) - (43.4/-49.3)	Yes ³	Yes ³	No
	18'	WP1-WP8/ WP5i-WP7i	90-160mph 116-205mph (12.2/-13.8) - (38/-43.0)	Yes ³	Yes ³	No
Miami-Dade	9'	WP10i	185mph 235mph (54.4/-62.0)	Yes	No	No
	16'	WP8i	169mph 218mph (43.4/-49.3)	Yes	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models





AMARR HILLCREST

Value is a beautiful thing. With the Amarr Hillcrest collection you get more than a custom carriage house look. You get exceptional style and durability with conventional hardware at a competitive price.

Bead Board design with Wagon Wheel DecraTrim in True White with Castle Rock magnetic handles and hinges





DESIGNS

Long Bead Board

Recessed

Decorative Windows & Hardware

Choose DecraTrim window inserts to coordinate with your home's design along with optional decorative hardware. See page 14 for all window and decorative hardware options.

HI1000

Single-Layer:

H12000 Double-Layer: Steel + Insulation

H13138

1-3/8" Triple-Layer: Steel + Insulation + Steel

HI3000

2" Triple-Layer: Steel + Insulation + Steel



COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White



































WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of	Door Width	WindPro		Impact Resistant	Windows	
635lbs.	Up To		MPHYMPH* (PSF Design Pressures)		Standard	Impact
Amarr Hillcrest HI3000	9'	WP1-WP6/ WP5i-WP7i	90-155 mph 123-200 mph (14.3/-16.9) - (38.0/-45.0)	Yes ³	LP ³	LP ³
Lifetime	16'	WP1-WP5/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.3/-13.9) - (36.4/-41.4)	Yes ³	LP ³	LP ³
Limited Warranty	18'	WP1-WP5/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.2/-13.8) - (36.1/-40.8)	Yes ³	LP ³	LP ³
Amarr Hillcrest HI3138	9'	WP1-WP5/ WP5i-WP7i	95 - 155 mph 122 - 200 mph (14.3/-16.9) - (38.0/-45.0)	Yes ³	LP ³	LP ³
Lifetime	16'	WP1-WP5/ WP5i-WP7i	90 - 130 mph 116 - 155 mph (12.3/-13.9) - (25.6/-29.1)	Yes ³	LP ³	LP ³
Lanited Warranty	18'	WP1-WP5/ WP5i	90 - 130mph 116 - 168mph (12.2/-13.8) - (25.4/-28.7)	Yes ³	LP ³	LP ³
Amarr Hillcrest HI1000 and HI2000 15-Year Limited Westretly 25-Year Limited Westretly	9'	WP1-WP8/ WP5i-WP8i	90-169mph 116-218mph (12.8/-15.1) - (45.2/-53.4)	Yes ³	LP ³	No
	16'	WP1-WP5 WP5i-WP7i	90 - 156 mph 116 - 202 mph. (12.3/-13.9) - (38.0/-42.0)	Yes ³	LP ³	No
	18'	WP1-WP6 WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.2/-13.8) - (37.0/-40.6)	Yes ³	No	No

Tested in accordance with DASMATDS-108 Based on ASCE7-05 Based on ASCE7-10 Option available on select models








AMARR DESIGNER'S CHOICE

Energy efficiency makes the Amarr Designer's Choice a popular choice for garage doors. With a high R-value of 19.40[†], this door gives you the ultimate in energy efficiency and quiet operation.

Bead Board design in True White with Castle Rock magnetic handles and hinges



DESIGNS



DC3138 Triple-Layer: Steel + Insulation + Steel





+ Steel



Decorative Hardware

home. See page 14 for

hardware options.

Choose decorative hardware

to best coordinate with your

COLORS

Actual paint colors may vary from samples shown Price upcharge applies to all colors except True White

















DC3138 only available in True White and Color Zone.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to	Door WindPro Width		Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Windows	
14'tallor a max weight of 635lbs.	Up To		MPHYMPH? (PSF Design Pressures)		Standard	Impact
Amarr Designer's Choice DC3200 Lifetime	9'	WP1-WP5/ WP7i	90-155mph 116-200mph (12.8/-15.1) - (38.0/-44.9)	Yes ³	Yes	Yes
	16'	WP1-WP5/ WP7i	90-155mph 116-200mph (12.3/-13.9) - (37.0/-41.0)	Yes ³	Yes	Yes
	18'	WP1-WP3/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-40.6)	Yes ³	Yes	Yes
Amarr Designer's Choice DC3138 Lifetime	9'	WP1	90mph 116mph (12.8/-15.1)	No	No	No
	16'	WP1	90mph 116mph (12.3/-13.9)	No	No	No

Tested in accordance with DASMATDS-108 Based on ASCE7-05 Based on ASCE7-10 Option available on select models

OLYMPUS

AMARR

Energy efficiency makes Amarr Olympus doors popular models. With a high R-value of 19.40[†], these doors give you the ultimate in energy efficiency and quiet operation.

Long Panel design in True White



DESIGNS





Long Panel



Flush Panel available in OL3138 True White and Color Zone only, OL 3200 True White, Black and Color Zone only. Black available Summer 2004.

OL3138 Triple-Layer: Steel + Insulation + Steel




OL3200 Triple-Layer: Steel + Insulation + Steel



* 0L3138 only available in Flush and Short Panel designs in 8', 9' or 16' wide doors.

† For Short Panel True White and Flush Panel True White and Black only. 13.35 R-value for all other panels and colors

COLORS

















OL3138 only available in True White and Color Zone.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to	Door WindPro Width		Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Windows		
14'tall or a max weight of 635lbs.	Up To		MPH/MPHP (PSF Design Pressures)		Standard	Impact	
Amarr Olympus OL3200	9'	WP1-WP5/ WP7i	90-155mph 116-200mph (12.8/-15.1)-(38.0/-44.9)	Yes ³	Yes	Yes	
Lifetime	16'	WP1-WP5/ WP7i	90-155mph 116-200mph (12.3/-13.9) - (37.0/-41.0)	Yes ³	Yes	Yes	
	18'	WP1-WP3/ WP5i-WP7i	90-155mph 116-200mph (12.3/-13.9)-(37.0/-40.6)	Yes ³	Yes	Yes	
Amarr Olympus OL3138	9'	WP1	90mph 116mph (12.8/-15.1)	No	No	No	
Lifetime	16'	WP1	90mph 116mph (12.3/-13.9)	No	No	No	

Tested in accordance with DASMATDS-108 Based on ASCE7-05 Based on ASCE7-10 Option available on select models

 $^{^{\}bullet}$ DC3138 only available in Bead Board design in 8', 9' or 16' wide doors. † For True White Bead Board only, 13.35 R-value for all other panels and colors



AMARR HERITAGE

Style and beauty that stand the test of time. Choose from traditional or carriage house designs to create the steel garage door you always wanted. The Amarr Heritage collection provides a low-maintenance, 2" thick steel door with a lifetime warranty. Great looks for years to come.


Long Bead Board design with Moonlite DecratTrim in True White with Blue Ridge handles and hinges



DESIGNS

CARRIAGE HOUSE





HR1000 Single-Layer: Steel

HR2000 Double-Layer: Steel + Insulation HR3000 Triple-Layer: Steel + Insulation + Steel

ilable in Amarr Heritage HR3000 only



MOSAIC WINDOWS

Decorative Windows

Choose from DecraTrim window inserts or SlimLine windows to coordinate with your home. SlimLine windows available for HR3000 Flush and Ribbed panel designs only. See page 14 for all. window options.



Actual paint colors may vary from samples shown.
Price upcharge applies to all colors except True White COLORS







Woodgrain finishes are dual directional for all panel designs.















With Mosaic Window Options you decide the number and location of the windows. Only available for HR3000 traditional designs with Standard or Impact glass.

Recessed with Thames DecraTrim (RE30)



Short Panel with Waterford DecraTrim (SP25)



Long Panel with Moonlite DecraTrim (LP24)





WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to	Door WindPro Width		Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Windows	
14'tall or a max weight of 635lbs.	Up To		MPHYMPH ² (PSF Design Pressures)		Standard	Impact
Amarr Heritage HR3000	9'	WP1-WP6/ WP5i-WP10i	90-190mph 120-245mph (14.3/-16.9)-(57.0/-67.5)	Yes ³	SP, LP ³ , SL ³ MOSAIC	SP, LP
Lifetime	16'	WP1-WP5/ WP5i-WP9i	90 - 175 mph 117 - 224 mph (14.1/-14.1) - (48.0/-52.0)	Yes ³	SP, LP3	SP, LP
Limited Warrahly	18'	WP1-WP5/ WP5i-WP8i	100 - 165 mph 129 - 212 mph (15.0/-17.0) - (40.0/-46.0)	Yes ³	SP ³ LP ³ , SL ³	SP, LP
	20'	WP5-WP5i	130 mph 161 mph (23.1/-26.0)	Yes ³	SP ³ LP ³	SP ³ LP ³
Miami-Dade	9'	WP7i-WP10i	155 - 190 mph 202 - 245 mph (38.7/-48.3) - (57.0/-67.5)	Yes	No	SP, LP
	16'	WP6i-WP9i	155-175mph 202-225mph (37.0/-45.0) - (48.0/-52.0)	Yes	No	SP, LP
	18'	WP7i-WP8i	155-165mph 203-212mph (37.0/-44.5) - (42.0/-46.0)	Yes	No	SP, LP
Amarr Heritage HR1000 and	9'	WP1-WP8/ WP5i-WP10i	90 - 189 mph 123 - 244 mph (14.3/-16.0) - (57.0/-67.0)	Yes ³	SP,3LP3	SP ³
HR2000	16'	WP1-WP5/ WP5i-WP10i	90 - 185 mph 116 - 239 mph (12.3/-13.9) - (51.9/-58.9)	Yes ³	SP, LP3	SP ³
Lifetime Lunned Warrunty	18'	WP1-WP5/ WP5i-WP10i	90 - 180 mph 116 - 232 mph (12.2/-13.8) - (48.6/-55.0)	Yes ³	SP, LP3	SP ³
Miami-Dade	9'	WP8i-WP10i	169-189mph 214-244mph (45.3/-51.2) - (57.0/-67.0)	Yes	No	SP ³
	16'	WP7i-WP10i	156 - 185 mph 202 - 239 mph (38.0/-42.0) - (57.9/-58.9)	Yes	No	SP ³
	18'	WP8i-WP10i	165 - 180 mph 212 - 232 mph (42.0/-46.0) - (48.6/-55.0)	Yes	No	SP ³

Tested in accordance with DASMA TDS-108 Based on ASCE7-05 Based on ASCE7-10 Option available on select models



Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.



AMARR NORTHWOODS

The printed horizontal plank design on a ribbed section creates depth, texture and subtle dimension.

A perfect complement to modern, mid-century modern, and traditional architectural styles.







DESIGNS



N.W.3138 1-3/8" Triple-Layer: Steel + Insulation + Steel



Decorative Windows


Choose from standard Short Panel or Long Panel windows with color matched frames or the new SlimLine window (Black frame only) to coordinate with your home's design. See page 14 for window options.

September 2024

 $Pattern\,may\,vary\,from\,samples\,shown.$

NW3000 NW313B 2" Triple-Layer: Steel + Insulation **U**-factor + Steel: 24 ga. .26 Available

COLORS



The printed horizontal plank design creates depth, texture, and dimension.





WIND LOAD APPROVALS

Exposure B with mean roof height < 30* Doors are available up to 14' tall or a max weight of	Door Width	WindPro	Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Wind	dows
635lbs.	Up To		MPHYMPH ² (PSF Design Pressures)		Standard	Impact
Amarr Northwoods NW3000	9'	WP1-WP6/ WP5i-WP10i	90-190mph 120-245mph (14.3/-16.9) - (57.0/-67.5)	Yes ³	SP, LP3 SL3 MOSAIC	SP, LP
12-Year	16'	WP1-WP5/ WP5i-WP9i	90 - 175 mph 117 - 224 mph (14.1/-14.1) - (48.0/-52.0)	Yes ³	SP, LP ³ SL ³ MOSAIC	SP, LP
Limited Warrenly	18'	WP1-WP5/ WP5i-WP8i	100-165 mph 129-212 mph (15.0/-17.0) - (40.0/-46.0)	Yes ³	SP, LP,	SP, LP
M	9'	WP7i-WP10i	155 - 190 mph 202 - 245 mph (38.7/-48.3) - (57.0/-67.5)	Yes	No	SP, LP
Miami-Dade	16'	WP6i-WP9i	155 - 175 mph 202 - 225 mph (37.0/-45.0) - (48.0/-52.0)	Yes	No	SP ³ LP ³
	18'	WP7i-WP8i	155 - 165 mph 203 - 212 mph (37.0/-44.5) - (42.0/-46.0)	Yes	No	SP, LP
Amarr Northwoods NW3138	9'	WP1-WP5/ WP5i-WP7i	95 - 155 mph 122 - 200 mph (14.3/-16.9) - (38.0/-45.0)	Yes ³	SP ³ LP ³ SL ³	SP, LP
	16'	WP1-WP5/ WP5i-WP7i	90 - 130 mph 116 - 155 mph (12.3/-13.9) - (25.6/-29.1)	Yes ³	SP, LP, SL3	SP ³ LP ³
	18'	WP1-WP5/ WP5i	90 - 130 mph 116 - 168 mph (12.2/-13.8) - (25.4/-28.7)	Yes ³	SP ³ LP ³ , SL ³	SP ³ LP ³

Tested in accordance with DASMATDS-108 Based on ASCE7-05 Based on ASCE7-10 3 Option available on select models



AMARR LINCOLN

Exceptional value: Energy efficient, 2" thick traditional style garage doors with conventional hardware at competitive prices.

Short Panel design with Cascade DecraTrim windows in Wicker Tan



Flush Panel*



DESIGNS



*Li1000/Li2000 Flush Panel has stucco texture; L/3000 has woodgrain texture † Available in LI3138 only.

Decorative Windows

Choose from DecraTrim window inserts or SlimLine windows to coordinate with your home. SlimLine windows available for LI3138/LI3000 Flush and Ribbed panel designs only. See page 14 for all window options.

LI1000 Single-Layer:

LI3138

1-3/8" Triple-Layer:

Steel + Insulation + Steel

LI2000 Double-Layer: Steel + Insulation

Ribbert Panelt

LI3000 2" Triple-Layer: Steel + Insulation

+ Steel

💓 U-factor

COLORS

Actual paint colors may vary from samples shown. ice upcharge applies to all colors except True White.























* Available in LI1000/LI2000 Flush Panel design with stucco texture.

† Available in L13138/L13000 only.

WIND LOAD APPROVALS


Exposure B with mean roof height < 30' Doors are available up to	Door WindPro Width		Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Windows		
14'tall or a max weight of 635lbs.	Up To		MPH/MPH² (PSF Design Pressures)		Standard	Impact	
Amarr Lincoln LI3000	9'	WP1-WP6/ WP5i-WP7i	90-155mph 123-200mph (14.3/-16.9) - (38.0/-45.0)	Yes ³	SP ³ LP ³ , SL ³	SP, LP3	
Lifetime	16'	WP1-WP5/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.3/-13.9) - (36.4/-41.4)	Yes ³	SP, LP,	SP ³ LP ³	
Limited Westampy	18'	WP1-WP5/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.2/-13.8) - (36.1/-40.8)	Yes ³	SP, LP, SL3	SP, LP	
Amarr Lincoln LI3138	9'	WP1-WP5/ WP5i-WP7i	95 - 155 mph 122 - 200 mph (14.3/-16.9) - (38.0/-45.0)	Yes ³	SP, LP,	SP ³ LP ³	
Lifetime Lintant Wantanty	16'	WP1-WP5/ WP5i-WP7i	90-130mph 116-155mph (12.3/-13.9)-(25.6/-29.1)	Yes ³	SP, LP, SL3	SP ³ LP ³	
Estatistic Wantautry	18'	WP1-WP5/ WP5i	90-130mph 116-168mph (12.2/-13.8) - (25.4/-28.7)	Yes ³	SP, LP,	SP, LP	
Amarr Lincoln L11000 and L12000 15-Year Lindes Watersety 25-Year	9'	WP1-WP8/ WP5i-WP8i	90-169mph 116-218mph (12.8/-15.1)-(45.2/-53.4)	Yes ³	SP, LP3	SP ³	
	16'	WP1-WP5/ WP5i-WP7i	90 - 156 mph 116 - 202 mph (12.3/-13.9) - (38.0/-42.0)	Yes ³	SP, LP ³	SP ³	
	18'	WP1-WP6/ WP5i-WP7i	90-155mph 116-200mph (12.2/-13.8) - (37.0/-40.6)	Yes ³	SP	SP ³	

Tested in accordance with DASMATDS-108 Based on ASCE7-05 Based on ASCE7-10 Option available on select models



STEEL OPTIONS

GLAZING OPTIONS Clear (C) Obscure (0)* Frost (WF) Dark Tint (WD)† Standard and Impact glass; price upcharge applies AMARR CLASSICA TOP SECTIONS Closed Arch • Available for Tuscany (T1), Santiago (S1), Lucern (L1), Valencia (V1), Cortona (C1) Closed Square . Cortona (C2) Closed Arch • Northampton (N1) Closed Square • Northampton (N2) Closed Arch . Bordeaux (B1) Closed Square • Bordeaux (B2) Closed Square • Available for Tuscany (T2), Santiago (S2), Lucern (L2), Valencia (V2) Closed Double Arch Available for Tuscany (T1D), Santiago (S1D), Lucern (L1D), Valencia (V1D), Cortona (C1D) Danube (4)* No Insert Madeira (5)* Nile (6)* Rhine (7)* Seine (8) 411 Thames (10)* Window inserts shown on Clear glass Design also available with Obscure, Frost or Dark Tint glass AMARR CARRIAGE COURT TOP SECTIONS

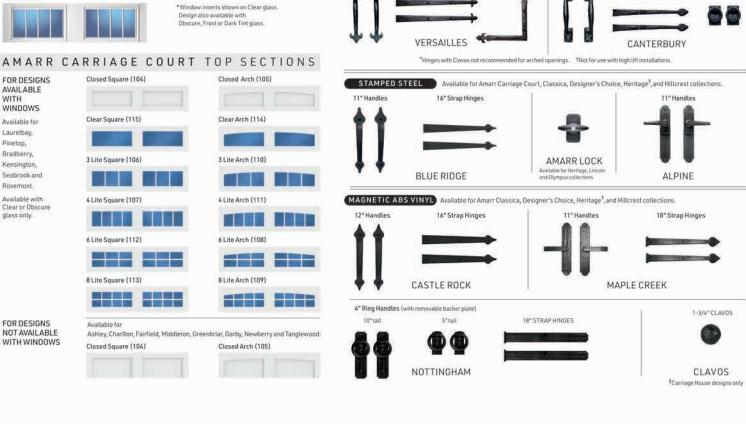

SLIMLINE WINDOW NEW

SESE

Full Sunray (28) Available for 16', 17' and 18' widths only.

SHORT

PANEL

Short Panel

DecraTrim

available for Heritage,

Stratford, and Lincoln

collections

LONG PANEL

Long Panel

DecraTrim

available for Heritage,

Stratford, Lincoln,

Oak Summit, and Hillcrest

collections.

inserts

inserts

No Insert

Cathedral (22)

Wagon Wheel (26)

No Insert

Cathedral (22)

Waterford (25)

Thames (30)

ALUMINUM

 \rightarrow

DECORATIVE HARDWARE

18" Strap Hinges With Clavos*

Full Sunray (28) Available for 15'6", 15'8", 16', 17' and 18' widths only.

Available in black or white frames only. Available for Heritage HR3000, Lincoln L13138/L13000 Flush and Ribbed Panel designs only, Northwood NW3138/NW3000 (Black frame only). Available in Clear, Frost and Dark

DECRATRIM WINDOW INSERTS Available with Clear, Obscure, Frost or Dark Tint glass.

部 部 都 部

PARTER PRESE

cillia cillia

SELECTION OF THE PARTY NAMED IN

Available for Amarr Carriage Court, Classica, Designer's Choice, Heritage[‡], and Hillcrest collections.

10-1/2" Handlest

Stockton (20)

Cascade (23)

Sunray (27)

Stockton (20)

Cascade (23)

Wagon Wheel (26)

Arched Thames (31)

Available August 2024

StimLine window size is the same width and half the height of a standard Long Panel window.

Prairie (21)

Waterford (25)

Five Piece Sunray (29) 10' in True White only.

Prairie (21)

Moonlite (24)

Sunray (27)

17" Strap Hinges With Clavos*

3-1/2" Ring Handles



AMARR BY DESIGN AD4000

Meticulously handcrafted for reliable performance.

These all-natural wood doors add striking beauty and value to your home. Unlimited custom designs available.

AD4000 Triple-Layer: Wood + Insulation + Wood





Custom designs available. Simply draw your own unique door, give it to your Amarr dealer, and we'll take it from there

WOOD CHOICES

Other types of wood available upon request. Doors shipped natural.









WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width	WindPro	Wind Load Approved for Wind Speeds Ranging	Impact Resistant		dows
	Up To		MPH/MPHP (PSF Design Pressures)		Standard	Impact
Amarr by Design AD 4000	10'	WP6-WP8/ WP6i-WP9i	142-176 mph 194-229 mph (37.0/-37.0) - (50.0/-57.0)	Yes ³	Yes	Yes ³
1-Year	16'	WP7/WP7i	158mph 205mph (40.0/-43.0)	Yes ³	Yes	No
Limited Warranty	18'	WP3-WP7/ WP5i-WP7i	111 – 159 mph 144 – 207 mph (21.0/-21.0) – (43.0/-43.0)	Yes ³	Yes	Yes ³
Miami-Dade 4 Doors are available up to 14'tall or a max weight of 635 lbs.	10'	WP8i-WP10i	169 - 185 mph 214 - 240 mph (45.3/-51.2) - (50.0/-62.0)	Yes	No	No

Based on ASCE7-05

Rased on ASCE7-10

AXOLOTL FOR AMARR AX3592

The Axolotl for Amarr collection of luxurious residential & commercial garage doors combine the high-quality Amarr 3552 aluminum frame with Axolotl's award-winning, sustainable, architectural surfaces.



EFFECTS









WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width	WindPro	Wind Load Approved for Wind Speeds Ranging	Impact Resistant	Wind	ows
4.30	Uр То		MPHYMPH2 (PSF Design Pressures)		Standard	Impact
Axolotl for Amarr AX3592	9'4"	WP6	140mph 181 mph (28.2/-33.1)	No	No	No
5-Year	16'2"	WP5	130mph 169mph (23.5/-26.7)	No	No	No

Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.

⁴ Miami-Dade wood doors require wood-on-steel base construction.




AMARR HORIZON HO1000

Gain a unique perspective for your home. The Amarr Horizon H01000 combines strong horizontal lines with long, narrow expanses of glass to make a distinctive design statement. These sleek, contemporary, aluminum doors are available with dozens of glazing and color options, so your choices are practically limitless, and the outlook is always bright.

DOOR CONFIGURATIONS

FOR SINGLE PANE GLAZING

1 Panel	2 Panels						



FOR INSULATED GLAZING



10		

FOR SIN	GLE PANE	GLAZING
Door Width	# Center Stiles	#Windows/Section
Up to 8'2"	0	2
8' 3" - 16' 2"	1	4
16' 3" - 20' 2"	2	6

FOR IN	SULATED G	LAZING
Door Width	# Center Stiles	#Windows/Section
Up to 10' 2"	()	4
10' 3" - 16' 2"	2	6
16' 3" - 20' 2"	3	8

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH/MPH* (PSF Design Pressures)	Impact Resistant		ass lable Impact
Amarr Horizon H01000	16'	WP3-WP4	120-130mph 163-169mph (21.8/-24.8-(23.0/-26.0)	No	Yes	No
5-Year	18'	WP2-WP5	104-130 mph 134-168 mph (14.7/-16.6) - (23.0/-26.0)	No	Yes	No

¹ Based on ASCE7-05

COLORS - HORIZON AND VISTA

IN STOCK











SPECIAL ORDER


ANODIZE

OPAQUE



Longer lead time and price upcharge may apply

CONSTRUCTION



ALUMINUM

An Amarr Horizon H01000 multiview door offers unique styling to match any modern architecture.

- Extruded aluminum frame provides durability, low maintenance and corrosion resistance
- WaterLok joint sealing system featuring new and improved wide tongue and groove section joints with feading-edge bulb seal and bottom weather seal for enhanced air-tight and waterresistant performance
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability



- · Equal glass heights in all sections of a door
- Glass expanses up to 8'2" wide

GLASS - HORIZON AND VISTA







Frost Snow* Whiteout*

*Laminated, not tempered. Insulated glass not available



² Based on ASCE7-10



AMARR VISTA VI1000

It's the perfect reflection of your style. The modern industrial look goes residential with the introduction of the Amarr Vista collection. From the outside, these sleek doors perfectly mirror the clean lines and glass expanses of your home's contemporary design.

Inside, they transform your garage into a bright and inviting room.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH ¹ MPH ² (PSFDesign Pressures)	Impact Resistant		ass lable Impact
Amarr Vista VI1000	9'	WP6	140 mph 180 mph (28.2/-33.1)	No	Yes	No
5-Year	12'	WP1-WP6	90-140mph 116-181 mph (11.4/-13.1)-(27.6/-31.7)	No	Yes	No
	16'	WP1-WP7	90-150mph 116-194mph (11.1/-12.6) - (31.2/-35.3)	No	Yes	No
	18'	WP5	132 mph 171 mph (23.8/-26.8)	No	Yes	No
	20'	WP2	104mph 135mph (14.7/-16.5)	No	Yes	No
	24'	WP2	104mph 136mph (14.7/-16.5)	No	Yes	No

¹ Based on ASCE7-05

SPECIAL ORDER



Glass is tempered and available as single pane or insulated.

Included

Longer lead time and price upcharge may apply.

NOT included








OPTIONAL PANELS








CONSTRUCTION

ALUMINUM

- 2" thick extruded commercial-grade aluminum frame provides durability, low maintenance and corrosion resistance
- WaterLok joint sealing system featuring new and improved wide tongue and groove section joints with leading-edge bulb seal and bottom weather seal for enhanced air-tight and water-resistant performance.
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability to doors 16'to 24'wide
- Wind load options to meet local building codes
- Attractive, modern exterior handles (2) included
- Available in 1"width increments up to 24"



² Based on ASCE7-10

ASCE 7-05 Wind Speed	90 MPH	110 MPH	130 MPH	155 MPH	185 MPH	
ASCE 7-10 Wind Speed (Florida)		142 MPH	168 MPH	200 MPH	239 MPH	DADE
DOOR WIDTH						
UP to 9'	12.8 / -15.1 psf	19.1 / -22.6 psf	26.7 / -31.6 psf	38.0 / -44.9 psf	54.2 / -64.0 psf	45.3 / -51.2 psf
10' to 16'	12.3 / -13.9 psf	18.3 / -20.8 psf	25.6 / -29.1 psf	36.4 / -41.4 psf	51.9 / -58.9 psf	45.8 / -49.3 psf
18'	12.2 / -13.8 psf	18.2 / -20.6 psf	25.4 / -28.7 psf	36.1 / -40.8 psf	51.4 / -58.1 psf	42.0 / -46.0 psf



STEEL SPECIFICATIONS

					CAI	RRIAG	ЕНОИ	SE DE	SIGN					TRADITIONAL				
	AMARR CARRIAGE COURT CC4000	AMARR CLASSICA CL1000	AMARR CLASSICA CL2000	AMARR CLASSICA CL3000	AMARR HILLCREST HI1000	AMARR HILLCREST HI2000	AMARR HILLCREST HI3138	AMARR HILLCREST HI3000	AMARR DESIGNER'S CHOICE DC3138	AMARR DESIGNER'S CHOICE DC3200	AMARR HERITAGE HR1000	AMARR HERITAGE HR2000	AMARR HERITAGE HR3000	AMARR NORTHWOODS NW3138	AMARR NORTHWOODS NW3000	AMARR LINCOLN LI1000	AMARR LINCOLN LI2000	
PANEL DESIGNS		100-11-11	25.000		7 (43 9 2 5 2)	107,00	ACHOLISES PA	*AV75.17%		100000000000000000000000000000000000000			100000000	***************************************				
Short																		
Long													(3 4)			*	100	
Flush				•:									9.00			•5		
Ribbed																		
Carriage House	18 Designs	7 Designs	7 Designs	7 Designs	3 Designs	3 Designs	3 Designs	3 Designs	1 Design	3 Designs	3 Designs	3 Designs	3 Designs		1,000			
CONSTRUCTION LAYERS	4	1	2	3	1	2	3	3	3	3	1	2	3	3	3	7	2	
Steel	101	-	-				250									*		
Steel + insulation						7.00												
Steel + Insulation + Steel				- 6				320	*	- %								
Overlay + Steel + Insul. + Steel				7.			1.	1,2511	20				-10	21	12.0			
DOOR THICKNESS	2" (5.1cm)	2"(5.1cm)	2"(5.1cm)	2"(5.1cm)	2"(5.1cm)	2*(5.1cm)	1-3/8"(3.5cm)	2"(5.1cm)	1-3/8"(3.5cm)	2"(5.1cm)	2"(5.1cm)	2"(5.1cm)	2"(5.1cm)	1-3/8"(3.5cm)	2"(5.1cm)	2"(5.1cm)	2"(5.1cm)	
INSULATION	Polystyrene ¹	34.00.000	Polystyrene ¹	Polyurethane	1012010114	Polystyrene ¹	Polystyrene ¹	Polystyrene ¹	Polyurethane	Polyurethane	30,101.101.1	Polystyrene ¹	Polystyrene ¹	Polystyrene ¹	Polystyrene ¹	15 360 3.25	Polystyrene1	
U-FACTOR 🌠	.026		0.32	0.22		0.32	0.27	0.23	0.24	0.19*		0.43	0.26	0.27	0.26		0.32	
R-VALUE ²	6.48		6.64	13.35		6.64	6.48	9.05	14.46	19.40*/13.35**		6.64	9.05	6.48	9.05		6.64	
STEELTHICKNESS	7.000		02070	59/8/8/		1.727.1	1000000	- 500	5.0000	(texter/reterres		100000	7,59	1,000	725761		1/855	
Gauge (ga)	27/27 ga	24 ga	24 ga	25/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	27/27 ga	27/27 ga	24 ga	24 ga	24/27 ga	27/27 ga	24/27 ga	25 ga	25 ga	
Gauge (mm)	0.42/0.42mm	0.61mm	0.61mm	0.53/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.61mm	0.61mm	061/0.42mm	042/0.42mm	061/0.42mm	0.53mm	0.53mm	
THERMAL SEAL		19350002	V05638533		112/20/2011	7/05/1000	PERSONAL PROPERTY.	100000000000000000000000000000000000000	•			.0225389500	7.0	Santage Control	(.e)	100200000	7(35,000)	
EXTERIOR COLOR OPTIONS																		
True White (TW)	-1				- 1			740					100				i.e.	
Almond (AL)								. •										
Wicker Tan (WK)	7.00				2			38//		6			1127					
Sandtone (ST)	•							100										
Terratone (TT)																		
Dark Brown (DN)								1940									5.00	
Charcoal Gray (EF)						1.01		(*)										
Black (BL)					847	745							V.				140	
Golden Oak (OK)		*:	(#	•			15			1	91					- 25		
Walnut (NT)					9					-							(*)	
Mahogany (MY)		•:	*		·	0.00	*	700		14								
Weathered Gray (WZ)				•:	:•	8.0		3.00									:•:	
Cedar															(¥)			
Aspen Gray															:•3			
WARRANTY																		
Paint Finish Warranty	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	12 years	12 years	15 Years	25 Years	
Workmanship/Hardware Wty	5 Years	3 Years	5 Years	Lifetime	1 Year	2 Years	3 Years	3 Years	5 Years	Lifetime	3 Years	5 Years	Lifetime	3 Years	Lifetime	1 Year	2 Years	

NDTE: Optional door locks and various heights and widths are available thru your local garage door dealer.



Amarr Color Zone

Over 800 Sherwin-Williams SnapDry™ paint colors approved color list is at amarr.com/amarr_color_zone. Your local Sherwin-Williams store can provide paint chips of selected color.



Insulation on Amarr brand doors has passed self-lignition, flamespread, and smoke developed index fire testing.

Calculated door section R-value is in accordance with DASMA TDS-163.

With White Overlay.

For complete warranty details, visif amarr.com or contact your local Amarr dealer.

Flush Panet design has Sfucco texture.

Black available Summer 2024

<sup>True White Bead Board only.

The White Bead Board only.

All the panels and colors except True White Bead Board.

True White Short and Flush panel designs only.

All panels and colors except True White Short and Flush panel designs.</sup>

ASCE 7-05 Wind Speed	90 MPH	110 MPH	130 MPH	155 MPH	185 MPH		IMPACT	STANDARD	WINDOWS	IMPACT	VINDOWS
ASCE 7-10 Wind Speed (Florida)		142 MPH ¹	168 MPH	200 MPH	239 MPH ¹	DADE ¹	RESISTANT	SHORT PANEL	LONG PANEL	SHORT PANEL	LONG PANEL
Amarr Carriage Court CC4000	(*)	((•)	•								
Amarr Classica CL3000		11 3 3	•					¥		(*)	
Amarr Classica CL1000 / CL2000	191	15.5	•								
Amarr Hillcrest HI3000	700	70	•				:•		300		•>
Amarr Hillcrest HI3138	3.97)										
Amarr Hillcrest HI1000 / HI2000		((₩)	*	*					190		
Amarr Designer's Choice DC3200		N.		•			9		(*)		
Amarr Designer's Choice DC3138	500										
Amarr Heritage HR3000					•	•		*			•
Amarr Heritage HR1000 / HR2000	7.00	0.€:	*	*		*	ۥ		190	(•°)	
Amarr Northwoods NW3000						•				(6)	
Amarr Northwoods NW3138	3.0	0.00							100	(●)	•:
Amarr Lincoln LI3000			*	*						•	•
Amarr Lincoln LI3138		5.					:•		0.00	(#C)	•.
Amarr Lincoln LI1000 / LI2000			*	*				*			
Amarr Olympus OL3200		2/9%	•8	*			*				
Amarr Olympus OL3138											•
Amarr by Design AD4000		(3€)	*	*		:	.19	*	83808	3.99	*
Axolotl for Amarr AX3592											
Amarr Horizon HO1000		3.00									
Amarr Vista VI1000											

Available on select models and select door widths. Check detailed Wind Load Approval chart for each product collection.

Short panel impact windows and panels are slightly misaligned by no more than 1.54"; returns and replacements not accepted. To see detailed drawing, contact sda. engineering@amarr.com Note: Check with local municipalities for specific building requirements for your location.

ALUMINUM SPECIFICATIONS

	AMARR HORIZON HO1000							
FRAME CONSTRUCTION	2" thick aluminum							
SECTION HEIGHTS	Varies by door height							
DOORWIDTHS	2" - 20"2" (in 1" increments)							
DOORHEIGHTS	6' - 20'1"							
CLEARVIEW STRUT SYSTEM	Only required for doors ≥ 16'							
COLORS								
Anodize	Clear, Champagne, Copper, Medium Bronze, Dark Bronze, Black							
Paint	26 standard PVDF colors, 21 standard Powder Coat colors, RAL and custom colors in both PVDF and Powder Coat							
GLASS								
Transparent	Clear, Obscure, ThermaPro Low-E							
Tint	Green, Bronze, Gray, GreyLite							
Opaque	Frost, Snow, Whiteout, Black Ice							
FINISH WARRANTY ²	5 Years (RAL & Custom Paint 3 Years)							
WORKMANSHIP WARRANTY	5 Years							
HARDWARE WARRANTY								

	AMARR VISTA VI1000					
FRAME CONSTRUCTION	2" thick aluminum					
SECTION HEIGHTS	21" and 24"; 18" for odd height doors					
COLORS						
Anodize	Clear, Champagne, Copper, Medium Bronze, Dark Bronze, Black					
Paint	26 standard PVDF colors, 21 standard Powder Coat colors RAL and custom colors in both PVDF and Powder Coat					
GLASS						
Transparent	Clear, Obscure, ThermaPro Low-E					
Tint	Gray, Bronze, Green					
Opaque	Frost, Snow, Whiteout, Black Ice					
OPTIONAL PANELS	Full View, Aluminum, Insulated Aluminum, Louvered, Perforated					
FINISH WARRANTY	5 Years					
WORKMANSHIP WARRANTY	5 Years					
HARDWARE WARRANTY	5 Years					

¹ For complete warranty details contact your local Amarr dealer.



Amarr participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of a complete sectional garage door assembly. The lower the U-factor rating, the better the thermal performance.

WOOD SPECIFICATIONS

	AMARR BY DESIGN AD4000
PANEL DESIGNS	
Carriage House	Unlimited Designs
CONSTRUCTION*	
Wood + Insulation + Wood	•
DOOR THICKNESS	3" (7.6cm)
R-VALUE	9.0
WOOD BASEPLY OPTIONS	
5/8" MDO Plywood (paint grade only)	
1/2" Marine Grade Plywood	*
5/8" Incense Cedar	
5/8" Clear Vertical Grain Cedar	•
5/8" Red Grandis	*
5/8" Mahogany	¥
Other materials available upon request	¥.
TRIM OVERLAY OPTIONS	
5/8" Moisture-and Rot-resistant	•
Extira Exterior Panel (paint grade only)	
5/8" Incense Cedar	
5/8" Clear Vertical Grain Cedar	•
5/8° Red Grandis	,
5/8" Mahogany	•
Other materials available upon request	
OPTIONAL WOOD DISTRESSING	
SECTION HEIGHT OPTIONS	18",21",28" or 32"
POLYSTYRENE INSULATION (1 3/8" thick)	
DECORATIVE WINDOW OPTIONS	
1/8" (0.32cm) Double Strength	
Insulated	
FIRE RATED DOORS AVAILABLE	*
SECTION WARRANTY ²	1 Year

*Optional: Wood-on-steel section construction is available. Some wind load pressures may require wood-on-steel construction.

1 Optional: Special-designed doors meet guidelines for CA Building Codes for use in Wildlife Urban Interface (WUI). Fire rated doors with insulated and tempered glass windows available.

² For complete warranty details, visit amarr.com or contact your local Amarr dealer.

Doors are shipped natural. Priming is available for paint grade doors. All doors require finishing on all six (a) sides of each section within two days of receipt of door(s) and prior to installation. Visit amarr.com for finishing recommendations.

Verified thermal performance rating per DASMA Thermal Performance Verification Program. For best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value rating (more heat resistance).

Lifetime

3 Years

Lifetime

5 Years

DESIGN

AMARR LINCOLN LI3000

3

2"(5.1cm)

Polystyrene

0.23

9.05

27/27 ga

.

.

1-3/8"(3.5cm)

Polystyrene

0.27

6.48

27/27 ga

.

•0

Lifetime

3 Years

OLYMPUS OL3200

.

TW/BL*

3

.

2*(5.1cm)

Polyurethane

0.19

19.40[†]/13.35[‡]

27/27 ga

0.42/0.42mm

.

.

Lifetime

Lifetime

TW

TW

1-3/8"(3.5cm)

Polyurethane

0.24

14.46

27/27 ga

0.42/0.42mm



Fairfield design with Closed Square in True White/White with Alpine decorative handles



Our Philosophy. Since 1951, we have successfully raised the standards of quality, value, and dependability in the garage door industry. Today, with the same promise of individual attention and great value for all our customers, we remain committed to offering Amarr products and services that raise those standards even higher.

Visit amarr.com for additional products, such as Amarr by Design custom wood carriage house doors, specialty doors, garage flooring, accessories, and a full line of Amarr commercial sectional, rolling slat, and rolling steel doors.

Your Local Amarr Dealer:

Amarr Company

165 Carriage Court Winston-Salem, NC 27105 800.503.DOOR

www.amarr.com

Amarr, Classica, and Heritage as words and logos are trademarks belonging to Amarr Company, owned by ASSA ABLOY.

Door specifications and technical data subject to change without notice.

Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

©ASSA ABLOY Printed in USA Form #6680724/5M/SPR



